



Manage this device with Digi Remote Manager

# ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

AnywhereUSB can be coupled with **Digi Remote Manager®**, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.


## FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports **Digi Remote Manager** cloud-based management platform to deploy, monitor and manage devices

## RELATED PRODUCTS



## APPLICATION EXAMPLE

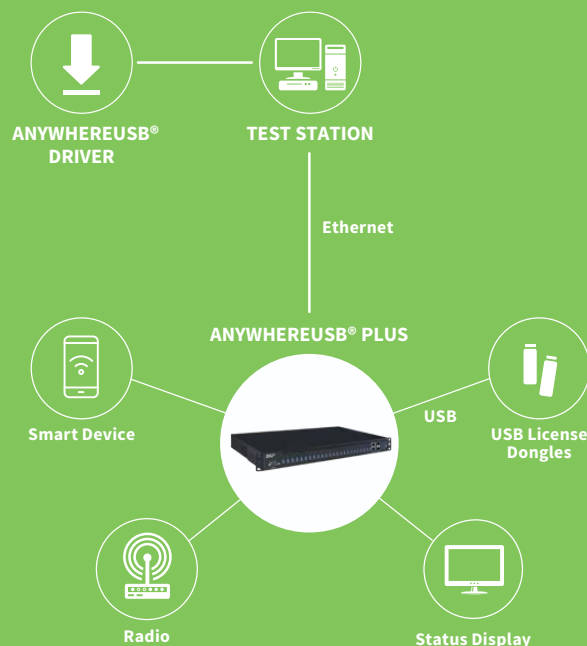

## SPECIFICATIONS

### ANYWHEREUSB® 2 PLUS

### ANYWHEREUSB® 8 PLUS

### ANYWHEREUSB® 24 PLUS

#### CELLULAR

<b>MODULE SUPPORT</b>	-	(1) Digi CORE® modem compliant socket	(1) Digi CORE® modem compliant socket
-----------------------	---	---------------------------------------	---------------------------------------

#### SOFTWARE AND MANAGEMENT

<b>REMOTE MANAGEMENT</b>	Digi Remote Manager® (cloud based)		
--------------------------	------------------------------------	--	--

<b>LOCAL MANAGEMENT</b>	WebUI (HTTP/HTTPS); CLI (SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)
-------------------------	-------------------------------	--	--

<b>OPERATING SYSTEMS</b>	Windows® 7, 8.1 and 10; Windows Server® 2012 R2, 2016 and 2019		
--------------------------	--	--	--

<b>PROTOCOLS</b>	Supports multi-host connectivity for each USB port or group independently		
------------------	---	--	--

<b>MEMORY</b>	512 MB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)
---------------	-------------------------------	-----------------------------	-----------------------------

#### NETWORK

<b>ETHERNET</b>	(1) RJ-45; 10/100/1000 Mbps	(1) RJ-45; 10M/100M/1G/10G	(2) RJ-45; 10M/100M/1G/10G
-----------------	-----------------------------	----------------------------	----------------------------

<b>SFP+</b>	-	(1) SFP+ socket	(2) SFP+ sockets
-------------	---	-----------------	------------------

#### CONNECTORS

<b>CONSOLE</b>	-	(1) DB09M; RS-232 DTE	
----------------	---	-----------------------	--

<b>USB</b>	(2) USB 3.1 Gen 1 Type A	(8) USB 3.1 Gen 1 Type A	(24) USB 3.1 Gen 1 Type A
------------	--------------------------	--------------------------	---------------------------

<b>USB PORT POWER</b>	1.8 A per port (simultaneous)	1 A per port (simultaneous)	1 A per port (simultaneous)
-----------------------	-------------------------------	-----------------------------	-----------------------------

#### PHYSICAL

<b>DIMENSIONS (L X W X H)</b>	118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in)	260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in)	450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in)
-------------------------------	---	--	--

<b>WEIGHT</b>	0.38 kg (0.84 lb)	1.58 kg (3.48 lb)	4.7 kg (10.36 lb)
---------------	-------------------	-------------------	-------------------

<b>STATUS LEDS</b>	(2) Ethernet, 2 (x1) USB, power	(2) Ethernet, (2) SFP+ 8 (x1) USB, power, fan, user, (3) future Wi-Fi/WWAN	2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1) PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN
--------------------	---------------------------------	--	--

#### POWER REQUIREMENTS

<b>POWER INPUT</b>	5 V, 5 A max	12 VDC, 12 A max	100-240 V, 3 A max (2 supplies for redundancy)
--------------------	--------------	------------------	---

<b>POWER CONSUMPTION</b>	25 watts max	98.5 watts max	157.7 watts max
--------------------------	--------------	----------------	-----------------

#### ENVIRONMENTAL

<b>OPERATING TEMPERATURE</b>	0° C to 40° C (32° F to 104° F)	0° C to 55° C (32° F to 131° F)	0° C to 55° C (32° F to 131° F)
------------------------------	---------------------------------	---------------------------------	---------------------------------

<b>RELATIVE HUMIDITY</b>	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
--------------------------	----------------------------	----------------------------	----------------------------

#### APPROVALS

<b>SAFETY</b>	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368	UL/EN60950, UL/EN62368 and CSA 22.2	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368
---------------	--	-------------------------------------	--

<b>EMISSIONS/IMMUNITY</b>	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
---------------------------	--	--	--

#### WARRANTY

<b>PRODUCT WARRANTY</b>	5-year		
-------------------------	--------	--	--

## ENTERPRISE SOFTWARE

### DESCRIPTION

<b>PROTOCOL SUPPORT</b>	HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager®
-------------------------	---


<b>SECURITY/VPN</b>	TLS 1.2, SSH, HTTPS
---------------------	---------------------

<b>ROUTING/FAILOVER</b>	Ethernet bonding (only for AnywhereUSB® 24 Plus)
-------------------------	--


<b>OTHER PROTOCOLS</b>	DHCP
------------------------	------

# PRODUCT IMAGES


ANYWHEREUSB 2 PLUS FRONT

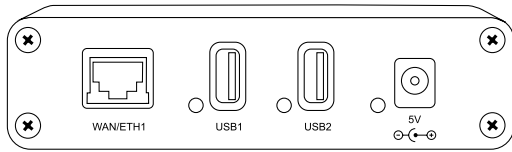


ANYWHEREUSB 2 PLUS BACK

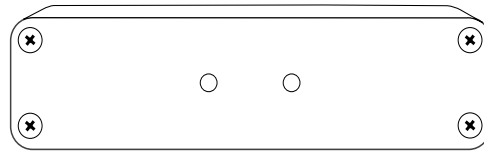


ANYWHEREUSB 8 PLUS FRONT

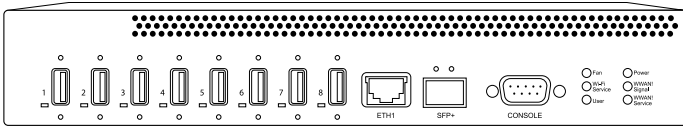


ANYWHEREUSB 8 PLUS BACK

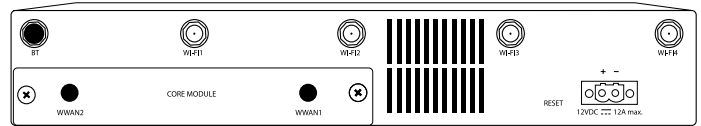

ANYWHEREUSB 24 PLUS FRONT



ANYWHEREUSB 24 PLUS BACK



PART NUMBERS	ANYWHEREUSB® PLUS MODELS
<b>ANYWHEREUSB 2 PLUS MODEL</b>	
AW02-G300	AnywhereUSB 2 Plus; dual USB 3.1 Gen 1 ports, single 10M/100M/1G Ethernet, 5 VDC (power supply sold separately)*
<b>ANYWHEREUSB 8 PLUS MODEL</b>	
AW08-G300	AnywhereUSB 8 Plus; eight USB 3.1 Gen 1 ports, single 10M/100M/1G/10G Ethernet, single SFP+, 12 VDC
<b>ANYWHEREUSB 24 PLUS MODEL</b>	
AW24-G300	AnywhereUSB 24 Plus; 24 USB 3.1 Gen 1 ports, dual 10M/100M/1G/10G Ethernet, dual SFP+, dual power 100-240 VAC

\*AnywhereUSB® 2 Plus requires a power supply or DC power source, see AnywhereUSB 2 Plus accessories listed below for details.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - RECOMMENDED POWER SUPPLY
76000965	AC power supply - extended temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug (6 A max)**

\*\*Recommended power supply for AnywhereUSB 2 Plus, provides full USB charging capability of 1.8 A per port.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - ALTERNATE POWER SUPPLIES
76000934	AC power supply - US plug to 5 VDC - 2.5 mm locking barrel plug (3 A max)***
76000935	AC power supply - EU plug to 5 VDC - 2.5 mm locking barrel plug (3 A max)***
76002021	AC power supply - standard temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug (3 A max)***

\*\*\*Alternative power supply may be used with AnywhereUSB 2 Plus if USB port charging is not required.

PART NUMBERS	ANYWHEREUSB® 2 PLUS ACCESSORIES - DIN MOUNTING BRACKET
76000682	DIN rail mounting kit for AnywhereUSB 2 Plus